




PALLETISING
END OF LINE AUTOMATION
An Mpac Group Company

LINE^X

As a global market leader and expert in automated handling systems, CSI palletising offers innovative, efficient, cost-effective and reliable solutions for customers worldwide. We offer tailor-made systems with high performance and first-class components. Delivering a high level of reliability requires good understanding of our customers' needs. Creating solutions together, through smart data analysis and intensive collaboration with customers and product specialists, guarantees an automated system that is optimally geared to the stretch targets set by our customers.

Multi line robotic palletising

- ✓ boosting the efficiency of your production line
- ✓ always a perfect fit in the space
- ✓ short installation time
- ✓ short payback time
- ✓ user friendly handling

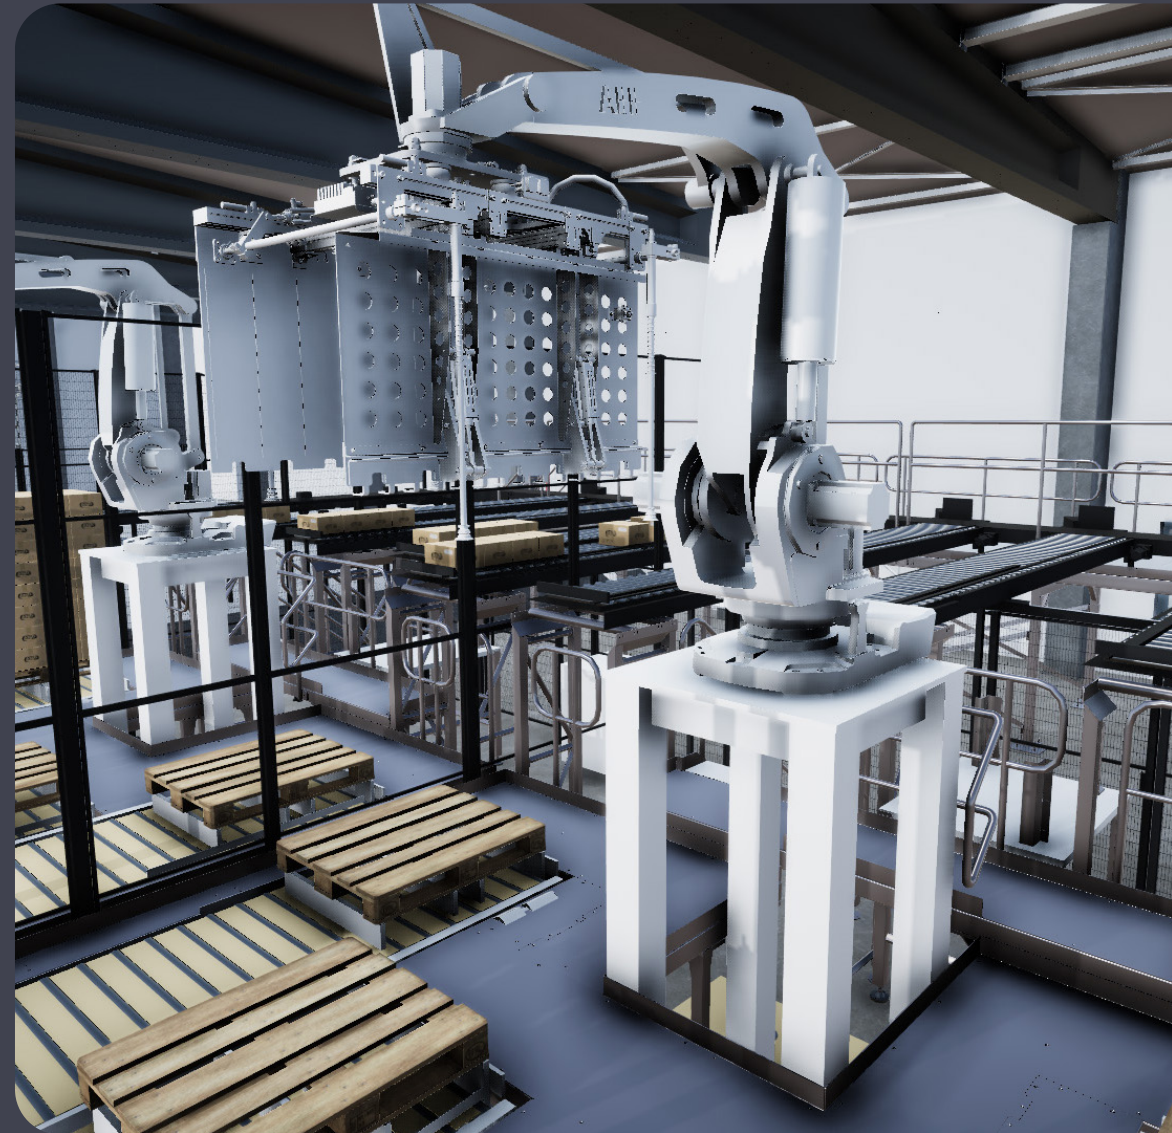

LINE^X

LINE^X is a freely and flexibly configurable robot palletising cell. The cells are configured on the basis of standardised, proven modules, produced in our low-cost manufacturing plant. This results in very competitive palletiser units. The LINE^X can be used as an end-of-line solution or centrally located in a multi-line system. All product handling grippers are suitable for the reliable and secure handling of a wide range of products.

High efficiency

LINE^X offers different palletiser configurations that suit your production and integrates the latest ABB/FANUC technology in robotics to ensure high efficiency and reliability.

3-year warranty

With over 60 years of experience, we have a high-quality standard. All our palletisers come with a standard 3-year warranty.

Infinite possibilities

The exponentiation to the variable power X represents the numerous possibilities and variety of configurations LINE^X has to offer. The specific needs of our customers can therefore always be met.

Characteristics

- High safety level (incl. robot workspace monitoring) according to PLd
- Savings because of compact footprint
- Energy Safe Function
- Flexible layout
- Multi-line connections
- Prepared for connections with upstream and downstream
- Tailor-made concepts with standardised modules
- Enabling vertical start-up

Product infeed height	2600 - 3000 mm
Pallet transport height	500 - 1000 mm
Line connection	1 - 4
Capacity	up to 7 strokes per minute 1200 mm per stroke
Loading height	Up to 2500 mm
Robot	ABB or Fanuc
Controls platform	Allen Bradley or Siemens
Footprint	2 lines: W3.8 x L6.8m 4 lines: W6.2 x L6.8m
Product dimensions	Min L150 x W120 x H80 mm Max L800 x W600 x H600 mm
Product weight	Max 65kg per stroke
Product types	Cartons, trays, shrink packs and crates
Pallet types	Euro, CHEP, GMA, Düsseldorfer, plastic pallets
Pallet weight	Max. 1300kg

Options

- Slipsheets
- Label / display orientation
- Fit for the US and Canadian market
- Patternware, easy programming of new pallet patterns

Start saving money, go to CSiportal.com and lease or buy your own smart palletiser today.



PALLETISING
END OF LINE AUTOMATION
An Mpac Group Company

CSi palletising

www.CSiportal.com • Info.CSi@Mpac-Group.com